



INDUSTRIAL DRIVE WAY STANDARDS TYPE A DESIGN CITY OF EL DORADO, KANS.

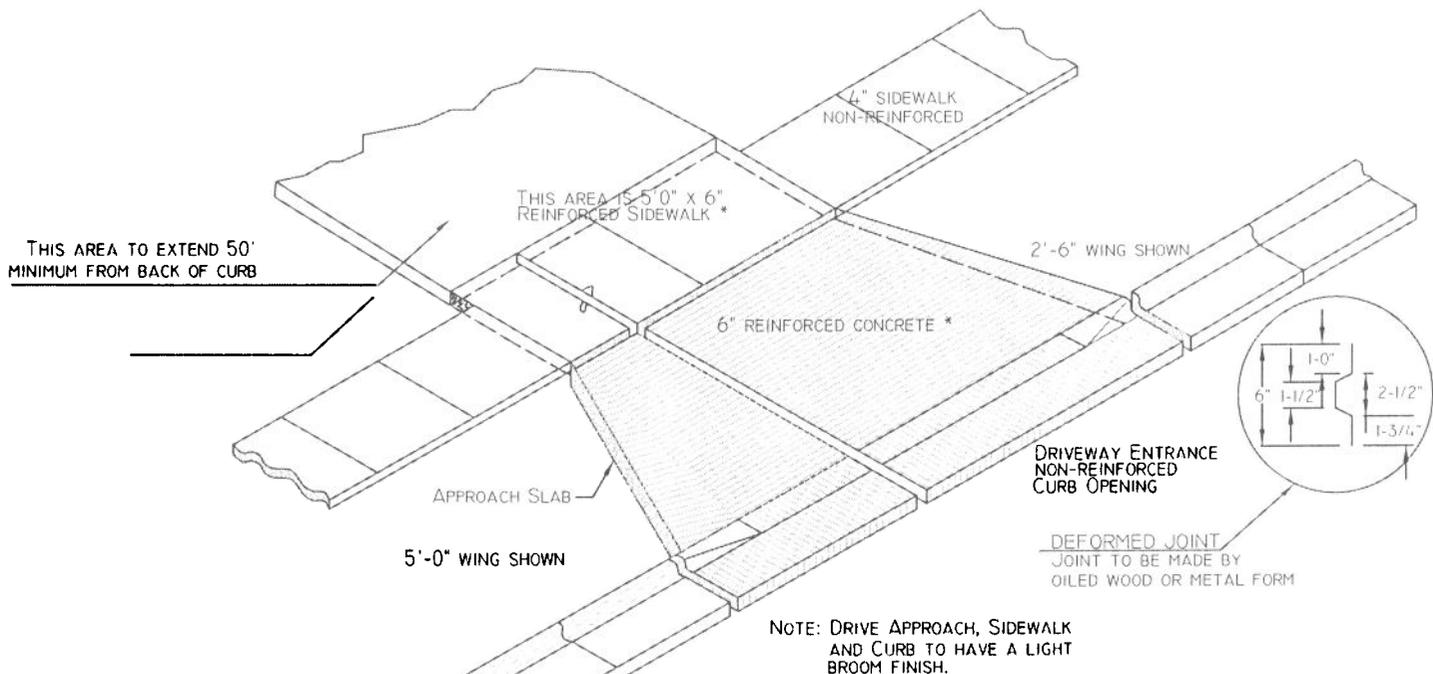

---SPECIAL NOTE---
CITY PROJECTS REQUIRE CONTRACTORS TO USE A CLASS A, AE CONCRETE MIX, P.S.I. 4000.
THIS IS SIMILAR TO A 6 SACK SMALL ROCK MIX WITH AIR ADDED. THIS MIX IS ALSO RECOMMENDED FOR HOME USE.
A VIBRATOR OR SIMILAR DEVICE WILL BE REQUIRED FOR ALL APPROACH AREAS.

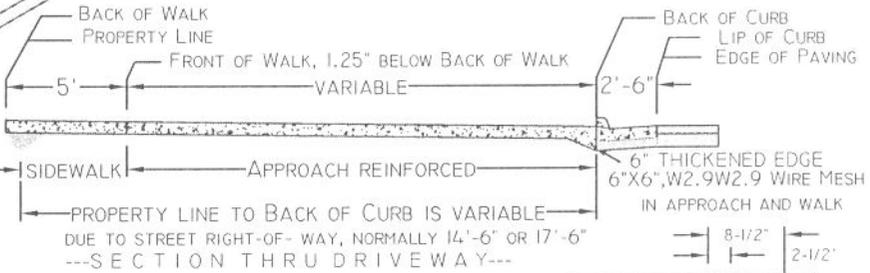


NOTE:

6" REINFORCED CONCRETE. *
6"X6", W2.9XW2.9 WIRE MESH MUST BE PLACED IN ALL NEW DRIVEWAY ENTRANCES, ACROSS ALL SIDEWALKS AND IN ALL APPROACH SLABS.

NOTE:

MAXIMUM GRADE FROM FLOWLINE OF CURB AND GUTTER TO FRONT OF WALK IS 1-1/4" RISE PER FT. OF TRAVEL, OR 11" ABOVE TOP OF CURB. MINIMUM GRADE FROM FLOWLINE OF CURB AND GUTTER TO FRONT OF WALK IS 1/2" RISE PER FOOT OF TRAVEL, OR 1" ABOVE TOP OF CURB.

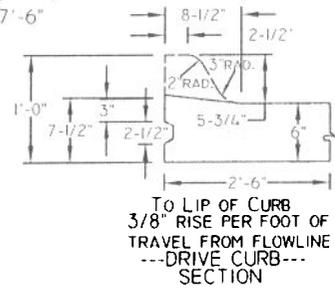

4" WALKS SHALL BE CUT THROUGH AT 4'-0" INTERVALS. A 3/4" ASPHALTIC EXPANSION JOINT SHALL BE PLACED AT 50' INTERVALS AND WHEN ABUTTING ANY CURB.

